



CHOOSING THE RIGHT FLOOR

KEITH® WALKING FLOOR® systems are available in a wide range of profiles and thicknesses to address the vast number of applications that are in use worldwide. A general description of uses, applications, and benefits to each system is below.

V-FLOOR® SERIES

- Heavy abrasion applications (Steel Slat only)
- Full length bearing support
- Full length hold-down
- Leak resistant

- Aluminum V-FLOOR® Slat typically used for MSW, recyclables, and light C&D
- Steel V-FLOOR® Slat designed for use in heavy C&D, scrap metal, aggregate, and asphalt



STEEL



ALUMINUM

J-MAX™ Steel Floor

The J-Max system is made of roll formed steel for longer wear when unloading abrasive material.

Designed for maximum performance and versatility.

- Used for Sand, Gravel, Glass, Wood, Waste, Mulch, MSW, Light Demolition, Construction Debris, Sticky, Abrasive Materials, Mineral Concentrates, Salt

STEEL



2921

STANDARD ALUMINUM


- Original WALKING FLOOR® slat profile
- Wide range of profile types
- Interchangeable slat designs
- Used for shredded paper, MSW, recyclables, biofuels, light to moderate C&D and wood forest products
- Available in thicknesses ranging from 1/8" to 3/4" triple ridge



BENT "Y"



(1/8")
2185



(7/32")
2190




(1/2" IMPACT)
2299




(3/4" IMPACT)
2301




HORIZONTAL




(3/16")
2271



(7/32")
2293




(3/8")
2754



(1/2" IMPACT)
2932

PRESSURE SEAL® LITE

- 21 Slat system
- Lighter weight
- Fast install
- Available in aluminum
- Excellent cleanout



1/8"




3/16"



7/32"

LEAKPROOF

- Designed for high moisture loads
- Can hold 12" of standing water
- Front mount drive
- Full length bearing support
- Used for MSW, medical waste and silage

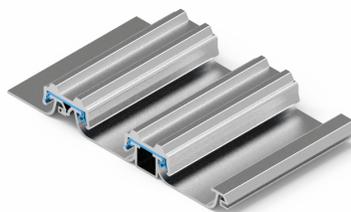

V-18 SERIES



1/2" Double Ridge



1/2" Triple Ridge


- For MSW
- Leak resistant
- No floor seal

* Check with your trailer manufacturer or local dealer to make sure your trailer is compatible with forklift traffic.


MOBILE APPLICATIONS

COMMON FLOORING AND COMPONENTS

V-FLOOR® SERIES

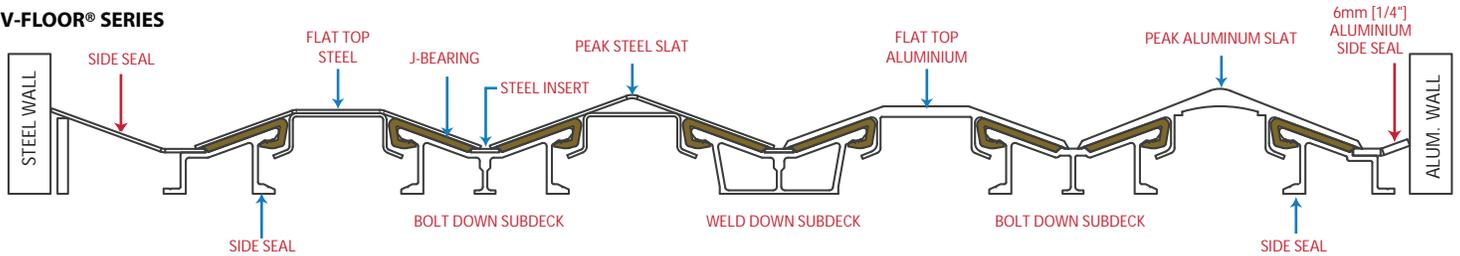

STANDARD 3.5" SLATS

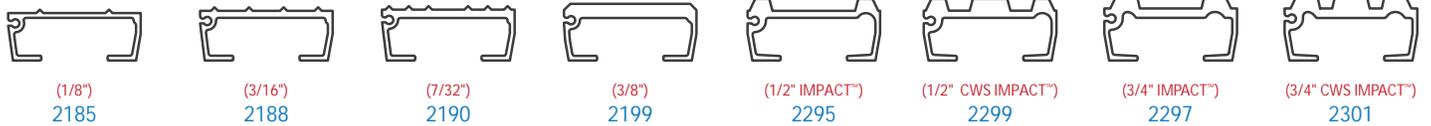

BEARINGS



SEAL




SUBDECK




PRESSURE SEAL® LITE



J-MAX™ Steel Floor

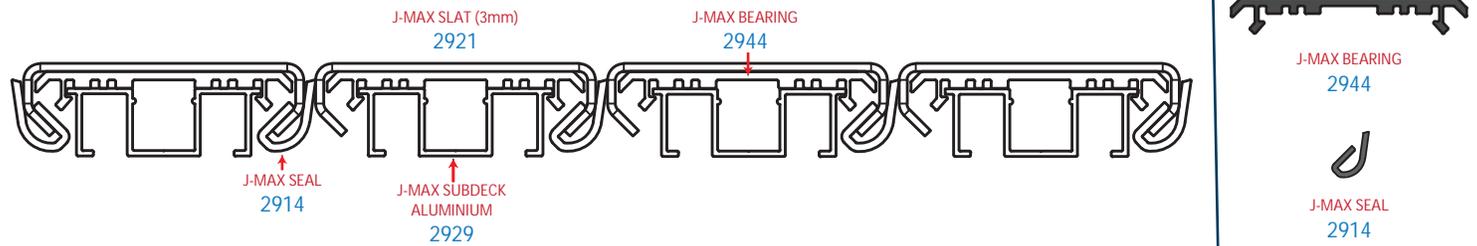

V-18 SERIES

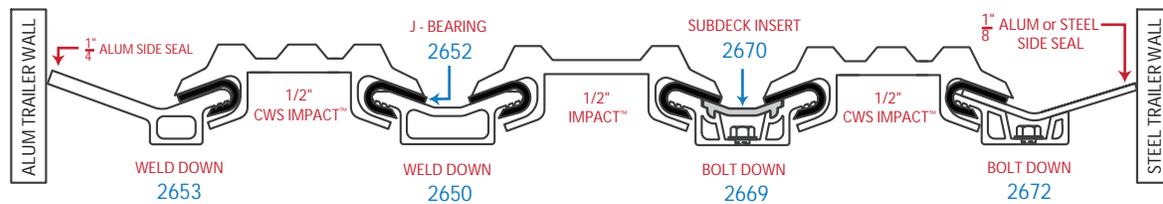

Consult local dealer or KEITH for specific part numbers for the slats.

LEAK PROOF (15 SLAT)



KEITH
MANUFACTURING CO

www.keithwalkingfloor.com

KEITH Manufacturing Co.
WORLD HEADQUARTERS
(800) 547-6161
(541) 475-3802
(541) 475-2169 fax
sales@keithwalkingfloor.com